



516AT

Tracked Trommel

The versatile 516AT features a side conveyor to allow producers to stockpile more high quality materials.


McCloskey International offers a wide range of drum designs and screen sizes to improve quality and meet high demand. Material such as topsoil, compost, sand and gravel, and wood chip spend more time in the sixteen foot drum for better screening results.

The screen sections allow for flexibility in sizing to maximize productivity, while the hydraulically folding end conveyor allows oversize material to be effectively stockpiled. The smaller transport dimensions allow for greater mobility from site to site.

Features

- 5'x16' heavy duty trommel drum
- Wheeled mobility
- Integrated hydraulic folding stockpiling conveyors
- Remote control radial conveyor
- Fast on-site setup time (10 minutes)
- Integral king pin/pivot point

Dimensions and Capacities

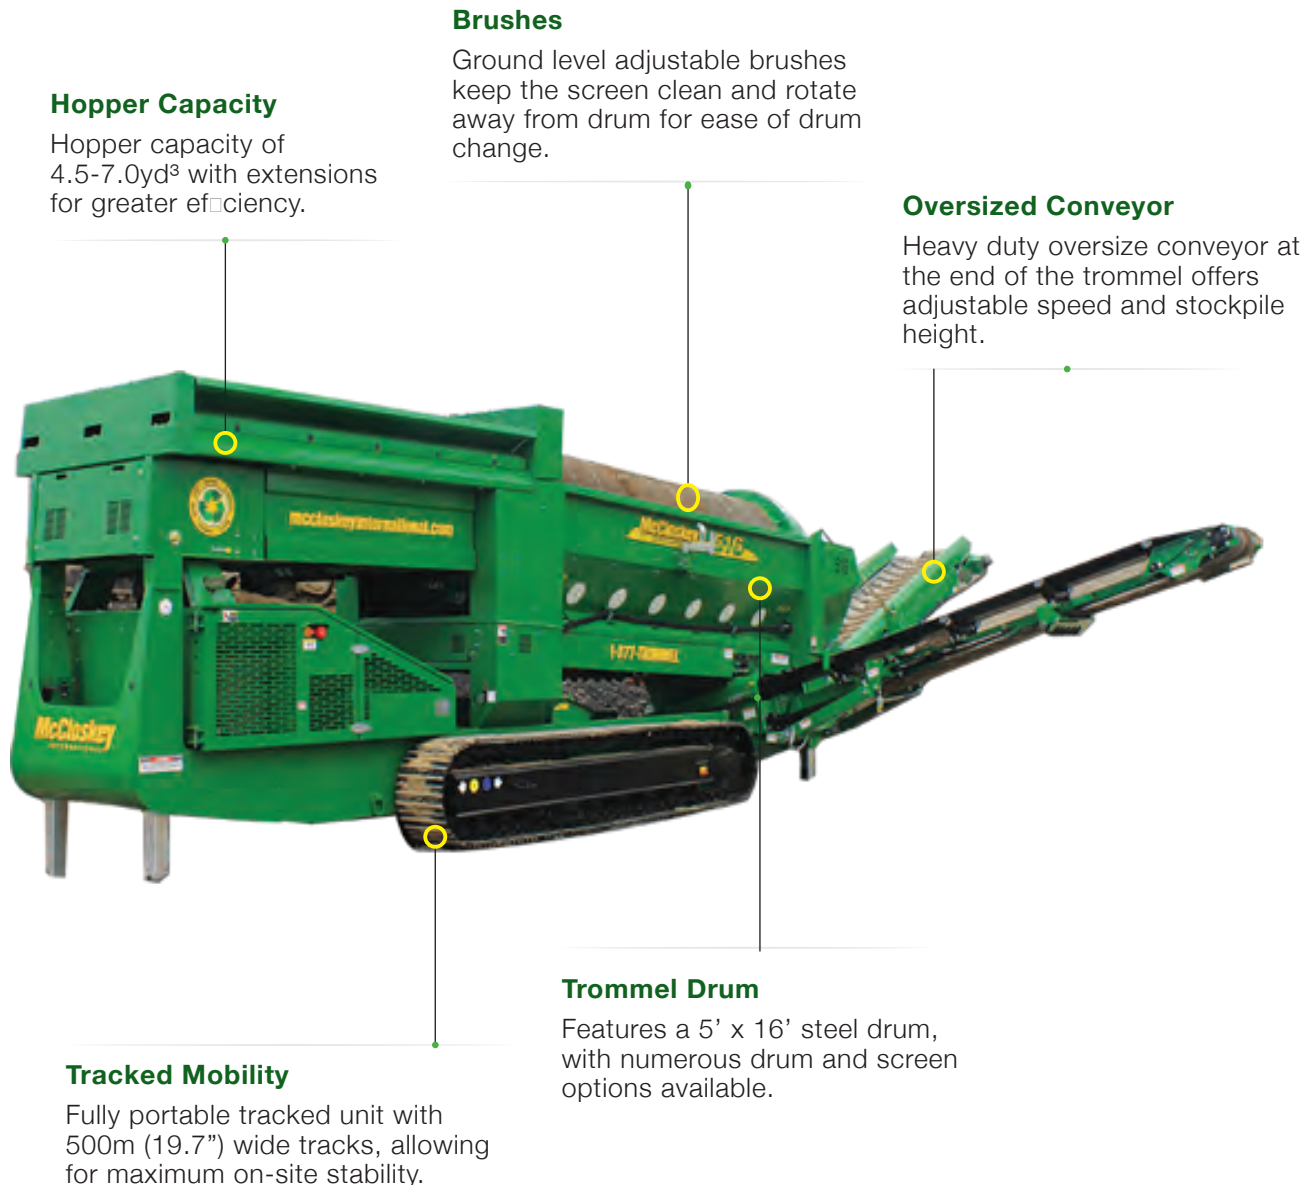

Engine	55kW (74Hp)
Transport Length	10.64m (34' 11")
Transport Width	2.83m (9' 3.5")
Transport Height	3.56m (11' 8")
Weight	21,230kg (46,800 lbs)
Working Height	3.53m (11' 7")
Working Length	14.10m (46' 3.5")
Side Stockpile Height	2.5m (8' 3")
Oversize Conveyor Stockpile Height	2.7m (8' 10")
Hopper Capacity	4.5 - 7.0yd ³
Drum	5' x 16' (1.52m x 4.88m)

©Copyright 2020 McCloskey International.
All rights reserved. McCloskey is a trademark of McCloskey International.

McCloskey International reserves the right to make changes to the information and design of the machines on this brochure without reservation and notification to the users. Information at time of print considered accurate — McCloskey International assumes no liability resulting from errors or omissions in this document.